



FLD 1000W

LED Lighting Solution


VOLTAGE: 100-277V

WATTS: 1000W


SKU: ML-TYU1000A

TECHNICAL SPECS

Rated Voltage	120-277V AC / 277-480 AC
PPF	2700 $\mu\text{mol/s}$
Efficacy	2.7 $\mu\text{mol/J}$
Min Power Factor	>90%
Dimmable	0-10V Controllable
Ambient Temperature	0 - 35°C / 32-95°F
Minimum Mounting Height	6" to top of Canopy
BTU	3,420
Light Distribution	120°
LED Lifespan (90% of Life)	50,000+ hours
Waterproof Rating	IP66 for Damp/Wet Conditions

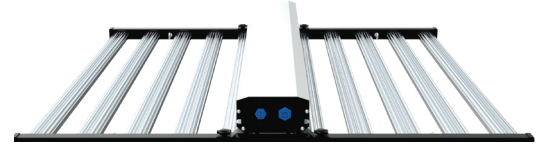


1000W LED SPECTRUM

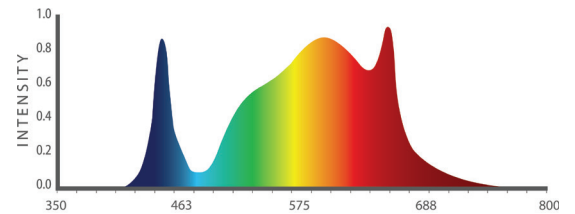

PRODUCT SIZE


PHYSICAL SPECIFICATIONS

Length	1187 mm	46.7"
Width	1087 mm	42.8"
Height	57 mm	2.24"
Weight	22.6kg	49.8lbs



VOLTAGE AND AMPERAGE

120V	9.3A	1060W
208V	5.15A	1015W
240V	4.43A	1010W
277V	3.8A	1000W
347V	2.8A	925W
480V	2.2A	1000W

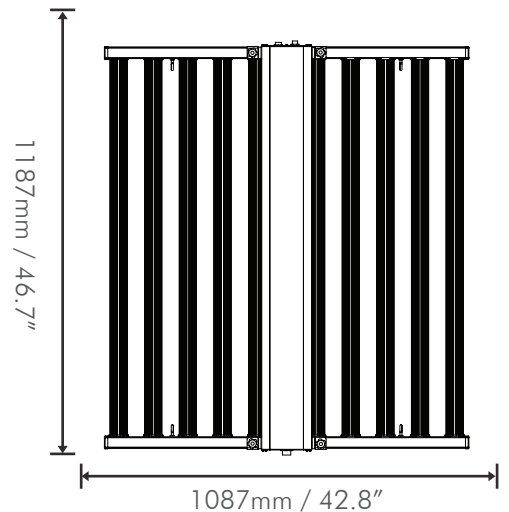

iluminarlighting.com
Toll Free: 1-877-540-5588

5 YEAR
WARRANTY

© Copyright 2023 ILUMINAR Lighting
Subject to change without notice.