



GR LED BAR

ML ILG1 5000

LED Lighting Solution


SKU: iL-GRB-100 VOLTAGE: 100-277V

SKU: iL-GRB-277 VOLTAGE: 277-480V


WATTS: 150W




150W LED SPECTRUM

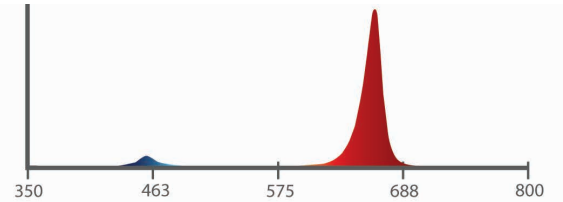

PRODUCT SIZE



57mm / 2.24"

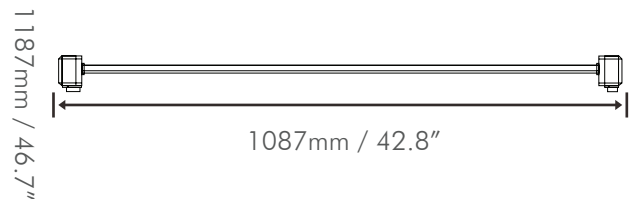

1187mm / 46.7"

1087mm / 42.8"

TECHNICAL SPECS

Rated Voltage	120-277V AC / 277-480 AC
PPF	450 $\mu\text{mol/s}$
Efficacy	3.0 $\mu\text{mol/J}$
Min Power Factor	>90%
Dimmable	0-10V Controllable
Ambient Temperature	0 - 35°C / 32-95°F
Minimum Mounting Height	6" to top of Canopy
BTU	3,420
Light Distribution	120°
LED Lifespan (90% of Life)	50,000+ hours
Waterproof Rating	IP66 for Damp/Wet Conditions

PHYSICAL SPECIFICATIONS

Length	2418 mm	95.2"
Width	130 mm	5.12"
Height	116 mm	4.57"
Weight	5.465kg	12.05lbs

VOLTAGE AND AMPERAGE

120V	1.2A
208V	0.7A
240V	0.6A
277V	0.5A
347V	0.4A
480V	0.3A



iluminarlighting.com
Toll Free: 1-877-540-5588

5 YEAR
WARRANTY

© Copyright 2023 ILUMINAR Lighting
Subject to change without notice.