



# iL TOP 315W

ML TRV31502

LED Lighting Solution

SKU: iL-iLTOP-100 VOLTAGE: 100-277V

SKU: iL-iLTOP-277 VOLTAGE: 277-480V

WATTS: 315W

## TECHNICAL SPECS


Rated Voltage	120-277V AC / 277-480 AC
PPF	760 $\mu\text{mol/s}$
Efficacy	2.4 $\mu\text{mol/J}$
Min Power Factor	>90%
Dimmable	0-10V Controllable
Ambient Temperature	0 - 35°C / 32-95°F
Minimum Mounting Height	6" to top of Canopy
BTU	1,077
Light Distribution	120°
LED Lifespan (90% of Life)	50,000+ hours
Waterproof Rating	IP66 for Damp/Wet Conditions

## PHYSICAL SPECIFICATIONS


Length	2060 mm	81.10"
Width	60 mm	2.36"
Height	117 mm	4.61"
Weight	8.55kg	18.85lbs

## VOLTAGE AND AMPERAGE



120V	2.6A
208V	1.5A
240V	1.3A
277V	1.1A
347V	0.9A
480V	0.6A

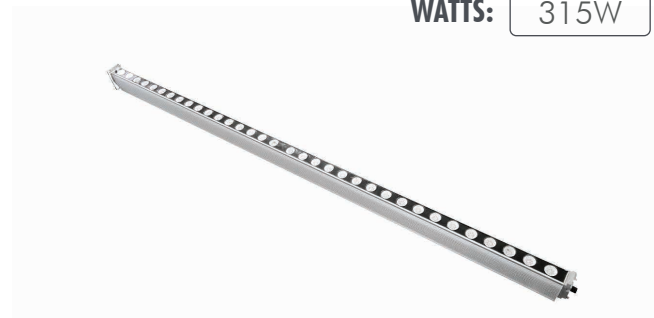

## 315W LED SPECTRUM

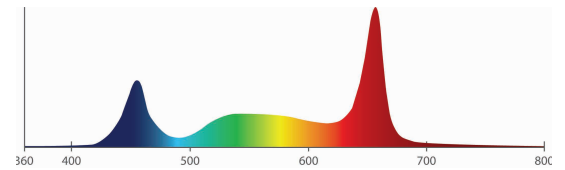

## PRODUCT SIZE

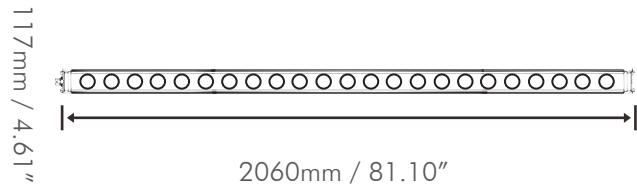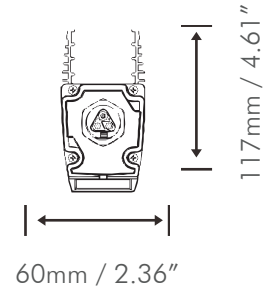

iluminarlighting.com  
Toll Free: 1-877-540-5588

**5 YEAR**  
WARRANTY

© Copyright 2023 ILUMINAR Lighting  
Subject to change without notice.