



iL1

LED Lighting Solution

MODEL: 2.6 VOLTAGE: 100-277V

WATTS: 660W SKU: IL-A166026-FSG-120

TECHNICAL SPECS

PPF	1716 $\mu\text{mol/s}$
BTU	2244
Efficacy	2.6 $\mu\text{mol/J}$
Min Power Factor	>0.9
THD	<20%
Crest Factor	0.99
Rated Voltage	120-277V AC
Voltage Range (+/-10%)	100-277V
Frequency	50 / 60Hz
Dimmable	0-10V Controllable
Ambient Temperature	0 - 35°C / 32-95°F
Relative Humidity	98%
Color Temperature	4000k
Color Rendering Index	88
Emitter Cooling	Passive Thermal Management
Light Distribution +/- 5%	125°
Waterproof Rating	iP65 for Damp/Wet Conditions
LED Lifespan (90% of Life)	54,000+ hours

PHYSICAL SPECIFICATIONS




Length	1500mm	59.1"
Width	129mm	5.1"
Height	200mm	7.9"
Weight	12.5kg	27.5lbs

VOLTAGE AND AMPERAGE

120V	5.67A	678W
208V	3.26A	671W
240V	2.81A	663W
277V	2.42A	655W
347V	1.96A	676W
480V	1.41A	661W



iL1 LED SPECTRUM

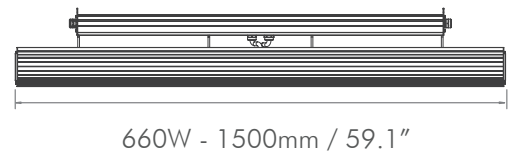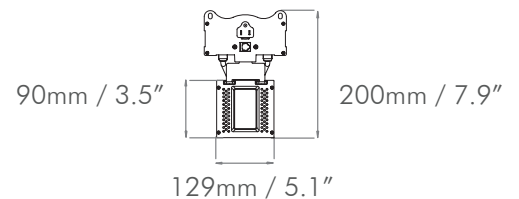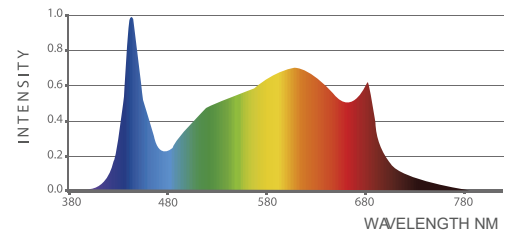

iluminarlighting.com
Toll Free: 1-877-540-5588

5 YEAR
WARRANTY

© Copyright 2022 ILUMINAR Lighting
Subject to change without notice.