



iL5x

LED Lighting Solution

MODEL: 2.6 **WATTS:** 440W

VOLTAGE: 100-277V 200-480V


SKU: IL-5x26FSG-120 IL-5x26FSG-480

TECHNICAL SPECS


Rated Voltage	120-277V AC	347-480V AC
Efficacy	2.6 $\mu\text{mol}/\text{J}$	
Min Power Factor	0.9	
THD	< 20%	
Crest Factor	0.99	
BTU	1460	
PPF	1144 $\mu\text{mol}/\text{s}$	
Frequency	50 / 60Hz	
Dimmable	0-10V Controllable	
Ambient Temperature	0 - 35°C / 32-95°F	
Relative Humidity	98%	
Plug Type	Power Cord Sold Separately	
Color Temperature	4000k	
Color Rendering Index	88	
Minimum Mounting Height	6"-12" to top of Canopy	
Emitter Cooling	Passive / Extruded Case	
Light Distribution +/- 5%	125°	
Waterproof Rating	IP65 for Damp/Wet Conditions	
LED Lifespan (90% of Life)	55,000+ hours	



iL5x 440W LED SPECTRUM

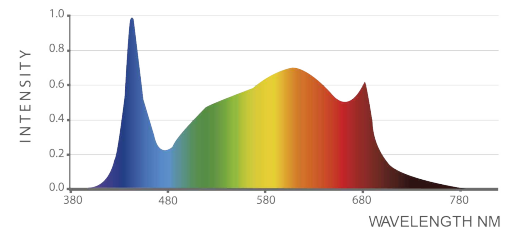


MOUNTING & COVERAGE

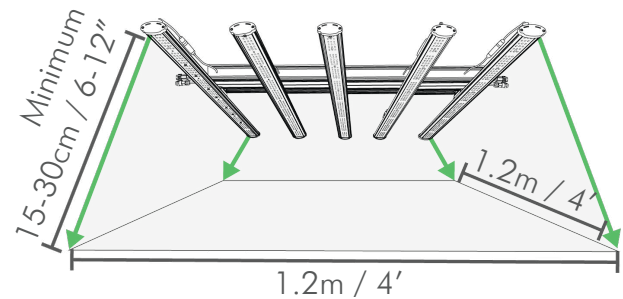


PHYSICAL SPECIFICATIONS

Length	1067mm	42.01"
Width	1003mm	39.49"
Height	129mm	5.08"
Weight	13.5kg	29.76lbs

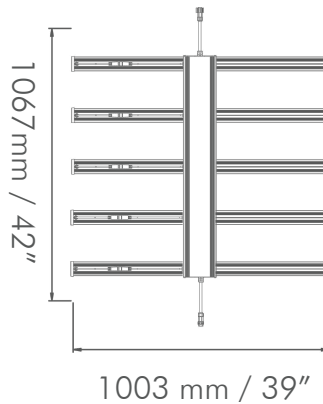

VOLTAGE AND AMPERAGE

120V	3.78A	452W
208V	2.16A	445W
240V	1.87A	443W
277V	1.63A	440W
347V	1.3A	449W
480V	0.94A	442W

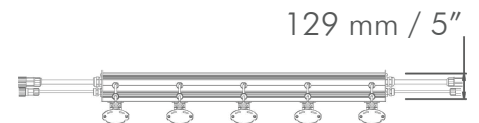

iluminarlighting.com
Toll Free: 1-877-540-5588

5 YEAR
WARRANTY

© Copyright 2022 ILUMINAR Lighting
Subject to change without notice.