



# iL9x

LED Lighting Solution

MODEL: 2.6 WATTS: 1000W

VOLTAGE: 100-277V


SKU: IL-9x26FSG-120

## TECHNICAL SPECS


Rated Voltage	120-277V AC
Voltage Range (+/-10%)	100-277V
PPF	2600 $\mu\text{mol/s}$
Efficacy	2.6 $\mu\text{mol/J}$
Min Power Factor	0.9
THD	< 20%
Crest Factor	0.99
BTU	3,400
Frequency	50 / 60Hz
Dimmable	0-10V Controllable
Ambient Temperature	0 - 35°C / 32-95°F
Relative Humidity	98%
Color Temperature	4,000k
Color Rendering Index	88
Minimum Mounting Height	6-12" to top of Canopy
Emitter Cooling	Passive / Extruded Case
Light Distribution +/- 5%	125°
Waterproof Rating	IP65 for Damp/Wet Conditions
LED Lifespan (90% of Life)	55,000+ hours



## iL9X LED SPECTRUM

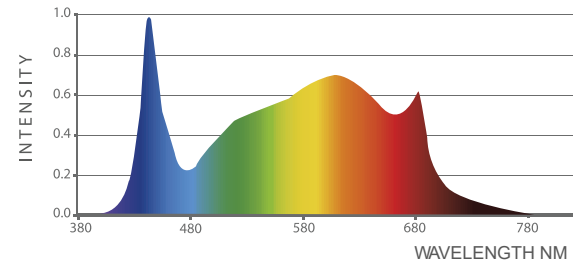

## MOUNTING & COVERAGE

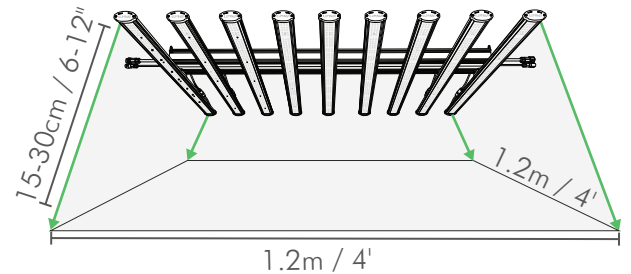

## PHYSICAL SPECIFICATIONS

Length	1067mm	42.01"
Width	1003mm	39.49"
Height	129mm	5.08"
Weight	18.58kg	40.96lbs

## VOLTAGE AND AMPERAGE

120V	8.5A	1018W
208V	4.86A	1001W
240V	4.21A	994W
277V	3.64A	985W
347V	2.95A	1015W
480V	2.12A	990W

