



iLiNe

ML TRV63002

LED Lighting Solution

SKU: iL-iLiNe-100

VOLTAGE: 100-277V

SKU: iL-iLiNe-277

VOLTAGE: 277-480V


WATTS: 630W

TECHNICAL SPECS

Rated Voltage	120-277V AC / 277-480 AC
PPF	1700 $\mu\text{mol/s}$
Efficacy	2.7 $\mu\text{mol/J}$
Min Power Factor	>90%
Dimmable	0-10V Controllable
Ambient Temperature	0 - 35°C / 32-95°F
Minimum Mounting Height	6" to top of Canopy
BTU	2,154
Light Distribution	120°
LED Lifespan (90% of Life)	50,000+ hours
Waterproof Rating	IP66 for Damp/Wet Conditions



630W LED SPECTRUM

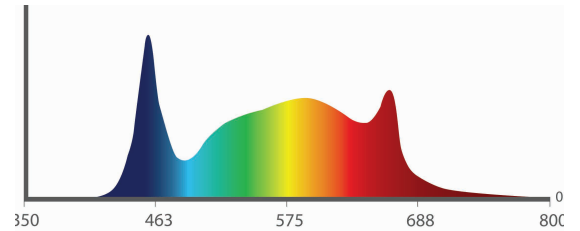

PHYSICAL SPECIFICATIONS

Length	1085 mm	42.72"
Width	120 mm	4.72"
Height	76 mm	2.99"
Weight	5.8kg	12.8lbs

VOLTAGE AND AMPERAGE

120V	5.25A
208V	3.0A
240V	2.6A
277V	2.2A
347V	1.8A
480V	1.3A



iluminarlighting.com
Toll Free: 1-877-540-5588

5 YEAR WARRANTY

© Copyright 2023 ILUMINAR Lighting
Subject to change without notice.