



iLi3

LED Lighting Solution

MODEL: 2.6


VOLTAGE: 100-277V

WATTS: 240W


SKU: IL-i326FSG-120

TECHNICAL SPECS


| | |
|----------------------------|------------------------------|
| PPF | 624 $\mu\text{mol/s}$ |
| Efficacy | 2.6 $\mu\text{mol/J}$ |
| Min Power Factor | 0.9 |
| THD | 15% |
| Crest Factor | 0.99 |
| BTU | 816 |
| Rated Voltage | 120-277V AC |
| Frequency | 50 / 60Hz |
| Dimmable | 0-10V Controllable |
| Ambient Temperature | 0 - 35°C / 32-95°F |
| Relative Humidity | 98% |
| Color Temperature | 4000k |
| Color Rendering Index | 88 |
| Minimum Mounting Height | 6" - 12" to top of Canopy |
| Emitter Cooling | Passive / Extruded Case |
| Light Distribution +/- 5% | 120° |
| Waterproof Rating | IP65 for Damp/Wet Conditions |
| LED Lifespan (90% of Life) | 55,000+ hours |

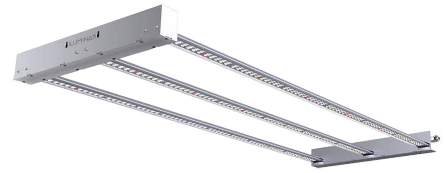

iLi3 240W LED SPECTRUM

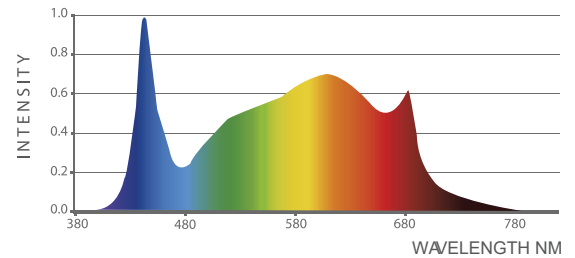


MOUNTING & COVERAGE

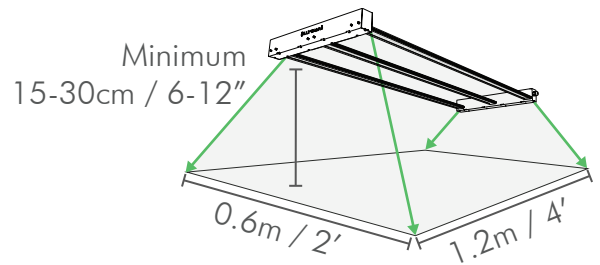

PHYSICAL SPECIFICATIONS

| | | |
|--------|--------|--------|
| Length | 1193mm | 46.97" |
| Width | 458mm | 18.04" |
| Height | 50mm | 1.97" |
| Weight | 6.6kg | 14.6lb |

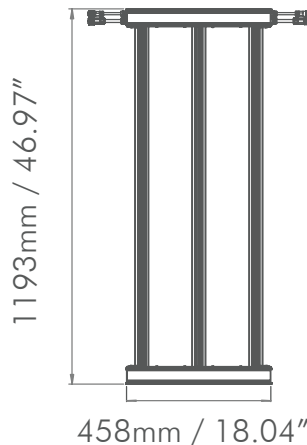

VOLTAGE AND AMPERAGE

| | | |
|------|-------|------|
| 120V | 2.11A | 251W |
| 208V | 1.2A | 244W |
| 240V | 1.09A | 241W |
| 277V | 0.9A | 240W |
| 347V | 0.71A | 245W |
| 480V | 0.51A | 239W |



iluminarlighting.com
Toll Free: 1-877-540-5588

5 YEAR
WARRANTY

© Copyright 2022 ILUMINAR Lighting
Subject to change without notice.