



iLi6

LED Lighting Solution

MODEL: 2.7 WATTS: 630W

VOLTAGE: 120-277V


SKU: IL-i627FSG-120

TECHNICAL SPECIFICATIONS


Rated Voltage	120-277V AC
Voltage Range (+/-10%)	100-277V
PPF	1700 $\mu\text{mol/s}$
Efficacy	2.7 $\mu\text{mol/j}$
Min Power Factor	0.9
THD	< 10%
Crest Factor	0.99
BTU	2155
Frequency	50 / 60Hz
Dimmable	0 - 10V Controllable
Ambient Temperature	0 - 35°C / 32-95°F
Relative Humidity	98%
Plug Type	Power Cord Sold Separately
Color Temperature	4000k
Color Rendering Index	88
Minimum Mounting Height	12" (30cm) to top of Canopy
Emitter Cooling	Passive Cooling
Light Distribution +/- 5%	125°
Waterproof Rating	IP66 for Damp/Wet Conditions
LED Lifespan (90% of Life)	36,000+ Hours



iLi6 630W LED SPECTRUM

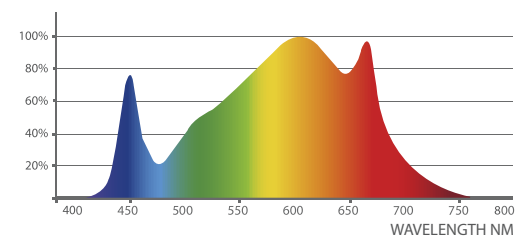

MOUNTING & COVERAGE

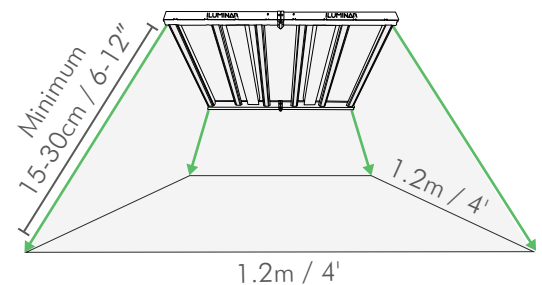


PHYSICAL SPECIFICATIONS

Length	1128mm	44.41"
Width	1086mm	42.76"
Height	58mm	2.29"
Weight	17.6kg	38.8lbs

VOLTAGE AND AMPERAGE

120V	5.38A	646W
208V	3.03A	630W
240V	2.63A	631W
277V	2.27A	629W
347V	1.79A	621W

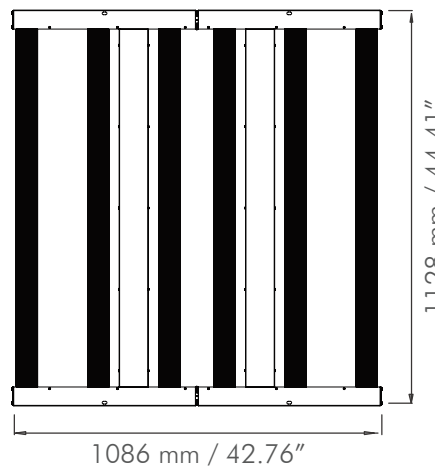

Intertek

iluminarlighting.com
Toll Free: 1-877-540-5588

5 YEAR
WARRANTY

© Copyright 2022 ILUMINAR Lighting
Subject to change without notice.