



**MODEL:** 2.6 **WATTS:** 330W

**VOLTAGE:** 100-277V **SKU:** IL-A133026-FSG-120

**VOLTAGE:** 200-480V **SKU:** IL-A133026-FSG-480




### LED Lighting Solution

#### TECHNICAL SPECS

PPF	858 $\mu\text{mol/s}$
Efficacy	2.6 $\mu\text{mol/J}$
Min Power Factor	>0.9
THD	<20%
Crest Factor	0.99
Heat Output (BTU/h)	1122
Rated Voltage	120-277V AC
Voltage Range (+/-10%)	100-277V
Frequency	50 / 60Hz
Dimmable	0-10V Controllable
Ambient Temperature	0 - 35°C / 32-95°F
Relative Humidity	98%
Plug Type	Power Cord Sold Separately
Color Temperature	4000k
Color Rendering Index	88
Emitter Cooling	Passive Thermal Management
Light Distribution +/- 5%	125°
Waterproof Rating	iP65 for Damp/Wet Conditions
LED Lifespan (90% of Life)	54,000+ hours



#### iL1c LED SPECTRUM

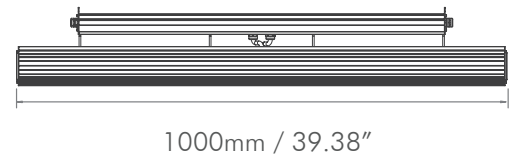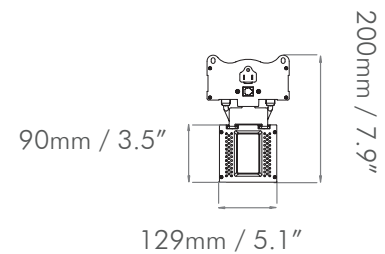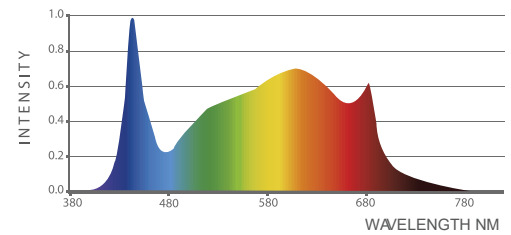

#### PHYSICAL SPECIFICATIONS

Length	1000mm	39.38"
Width	129mm	5.1"
Height	200mm	7.9"
Weight	8.3kg	18.3lbs

#### VOLTAGE AND AMPERAGE

120V	2.85A	341W
208V	1.63A	335W
240V	1.41A	332W
277V	0.22A	330W
347V	0.99A	340W
480V	0.71A	331W

