



UNDER CANOPY

MODEL IL-UNDCPY-160

WATTS 160W

VOLTAGE 120-277V

SKU IL- UC160W-FS

TECHNICAL SPECS

Efficacy	2.8 $\mu\text{mol/J}$
PPF	448 $\mu\text{mol/s}$
Input Power	160W
Input Voltage	120 - 277V AC
Input Current	0.58 - 1.33A
Frequency	50/60Hz
Thermal Management	Passive
Ambient Temperature	0-40°C / 32-104°F
Light Distribution	120°
Control	0 - 10V Dimming
Light Distribution	50,000 hrs



PHYSICAL SPECIFICATIONS

Length	1150 mm	45.3"
Width	72 mm	2.8"
Height	80 mm	3.1"

VOLTAGE & AMPERAGE

120V	1.33A
208V	0.77A
220V	0.73A
277V	0.58A

MOUNTING & COVERAGE




SPECTRUM BALANCING

FS SPECTRUM

A perfect companion for HPS and DE-HPS top lighting, our FS spectrum introduces additional yellow and green wavelengths, boosting photosynthesis, plant health, terpene profiles, as well as the development of lower flowers.

Photon efficacy: 2.8 $\mu\text{mol/J}$
PPF: 448 $\mu\text{mol/s}$

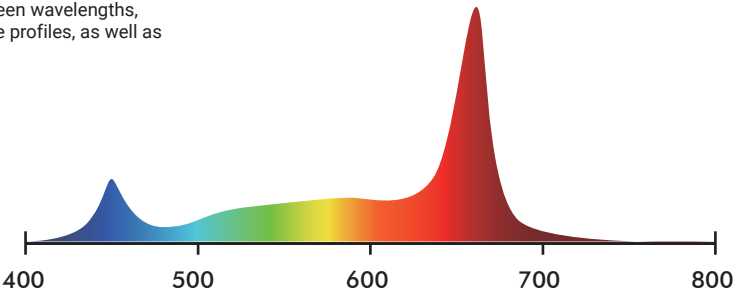

Daisy-Chain@:
120V - Up to 12 Lights | 240V - Up to 24 Lights | 277V - Up to 28 Lights



3FT (0.9m) Connection Cable
(sold separately)




6FT (1.82m) Extension w/ 0-10v Port
(sold separately)



POWER AND DATA

1 SINGLE JOINT CONNECTION

4FT x 4FT Area

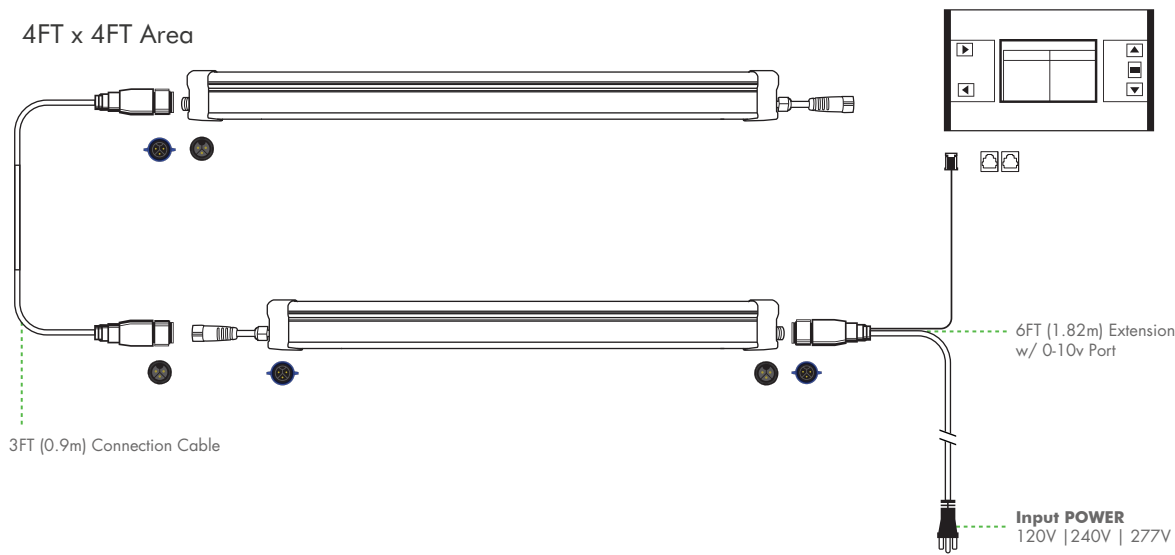

2 SINGLE JOINT CONNECTION

4FT x 8FT Area

