



630W
iLogic^{FS}
PLUS

MODEL: ILOGIC FS PLUS**WATTS** 630W**VOLTAGE:** 100-277V**SKU** IL-L630FS**TECHNICAL SPECS**

Rated Voltage	100-277V
Power Consump	630w±5%
Power Supply	Sosen LED Drivers
PPF	2099 μ mol
Efficacy	3.11 μ mol/J
LED Spectrum	Full Spectrum
Min Power Factor - Power Factor	>0.9
THD	< 10%
Crest Factor	< 10%
BTU	2100
Frequency	60Hz
Dimming	0-100% dimming via RS485
Ambient Temperature - Working	0°C - 35°C / 32° - 95°F
Relative Humidity	<90%
Color Temperature	4000K
Color Rendering Index	85
Emitting cooling	Aluminum heatsink
Light Distribution - Beam Angle	120 Degrees
Waterproof Rating	IP65
LED Lifespan	50000 hours
Daisy Chain	Max. 256 LED fixtures for output A and output B individually
Light Source	Samsung LM281B+Pro White LED* 1872 pcs Honglitrionic SMD3535 660nm Red LED* 168 pcs

VOLTAGE AND AMPERAGE

Voltage 120V 208V 220V 240V 277V

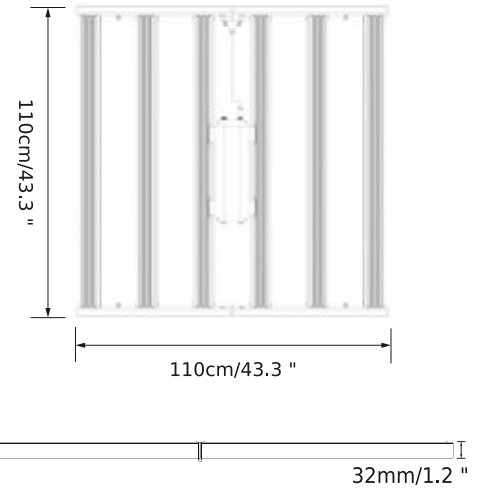
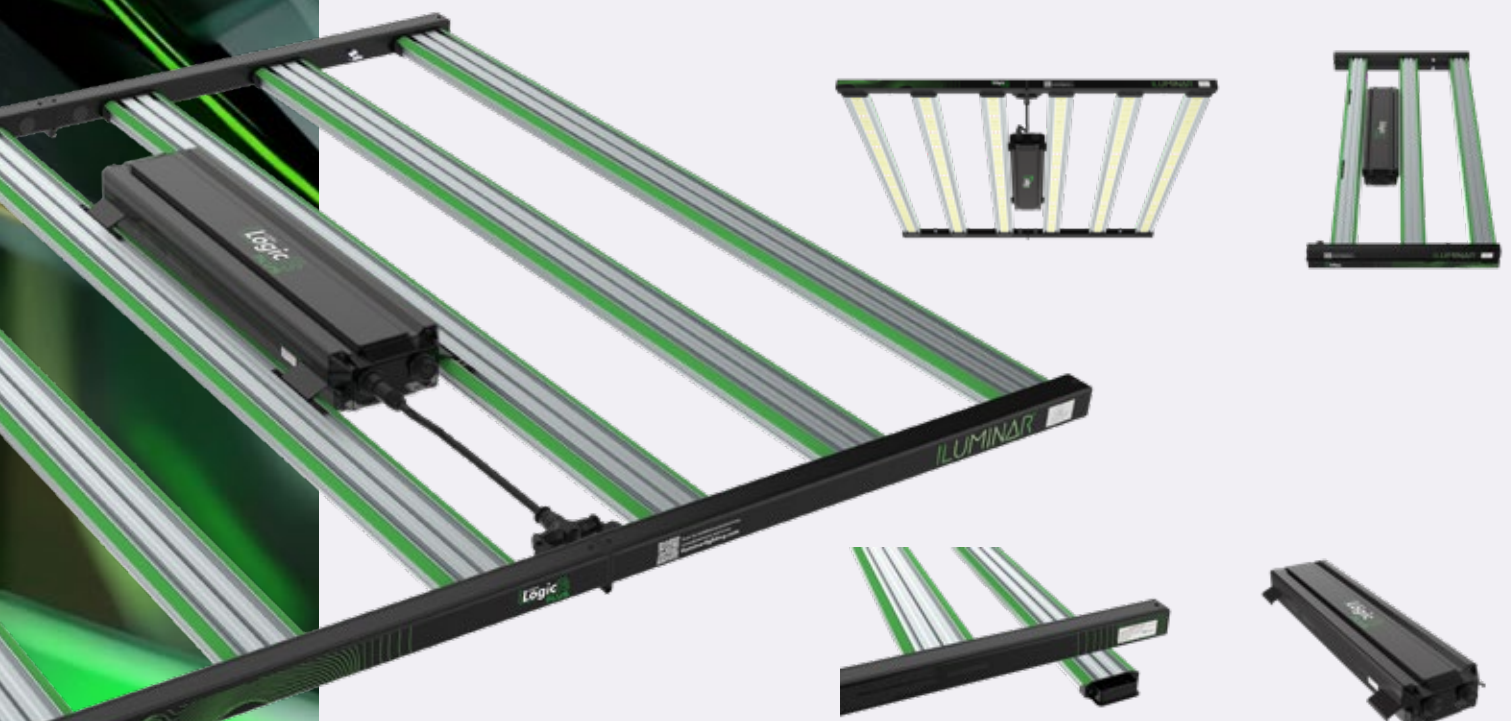
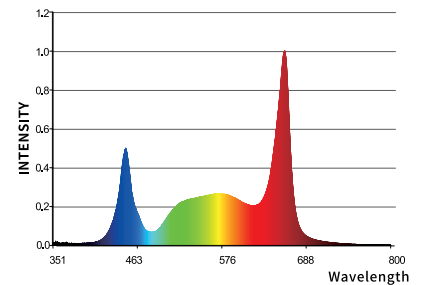
Amperage 5.25A 3.03A 2.87A 2.63A 2.28A

PHYSICAL SPECIFICATIONS

Height 75 mm/2.9"

Weight - N.W./G.W. 11.5kg/13kg | 25.3lbs/28.6lbs

PACKAGE SIZE 1130*575*85mm / 44.5* 22.6*3.3"

**SPECTRUM****5 YEAR**
WARRANTY

www.iluminarlighting.com ☎ 1-877-540-5588 ✉ sales@iluminarlighting.com

© Copyright 2024 ILUMINAR Lighting. Subject to change without notice.